

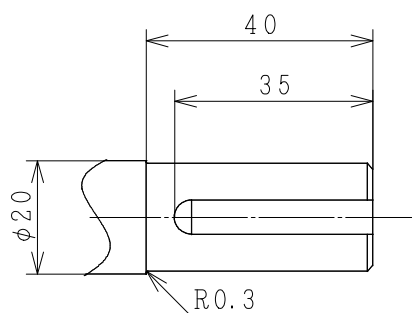
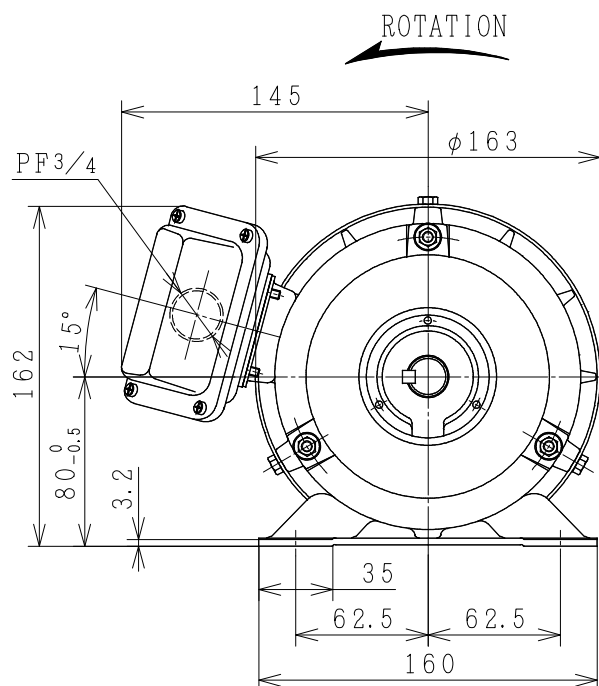



THREE-PHASE INDUCTION MOTOR

OUTPUT	TYPE	FORM	RATING	VOLTAGE (V)	FREQ. (Hz)	SYNC. SPEED (min ⁻¹)	POLES	INS. CLASS	MASS (kg)
1HP	TFO	K	S1	220/380	50	3000	2	F	10
1HP	TFO	K	S1	220/380	50	1500	4	F	12
1/2HP	TFO	K	S1	220/380	50	1000	6	F	12

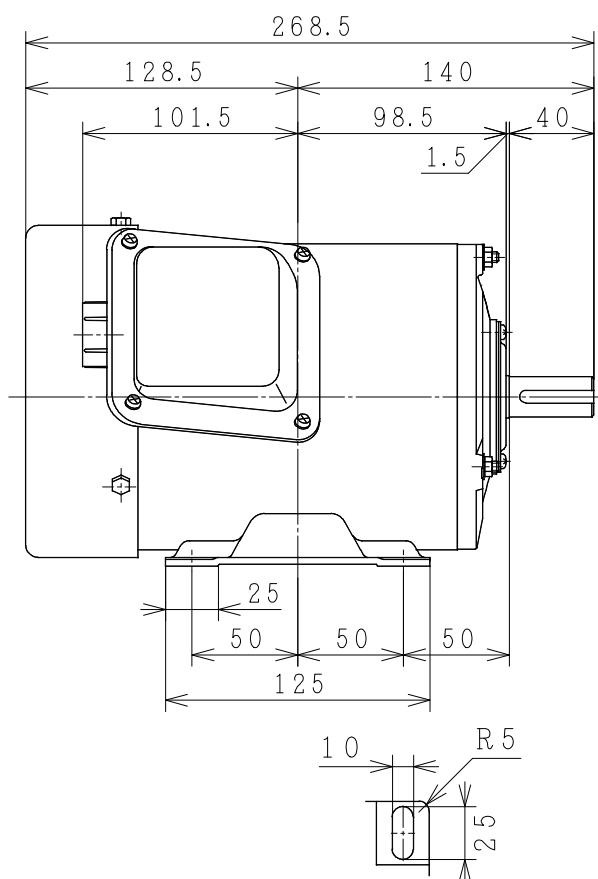

PROTECTION: IP55

PROJECTION



CUSTOMER				QTY.	ORDER No.		WORK No.	REV.
DWN.	W. KANCHIT	12-12-12	DIMENSIONS	HITACHI Hitachi Industrial Technology (Thailand), Ltd.		HITT WORKS DWG. No. 4HTD02466		SH.
CHKD.	W. THAWAT	S						
APPD.	T. Shimozone							
FRAME SIZE TFOB-80M (TMLR)								