
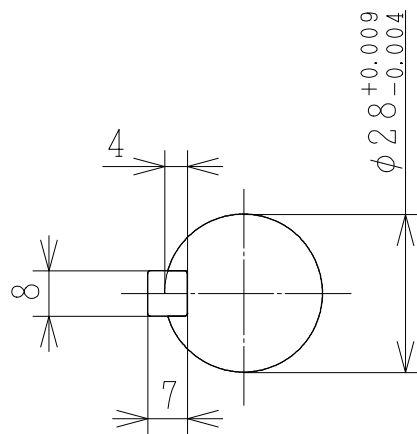
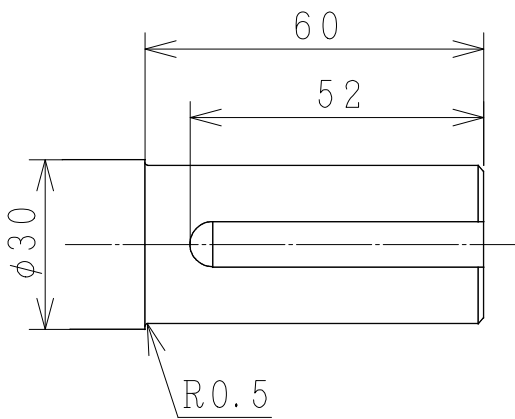
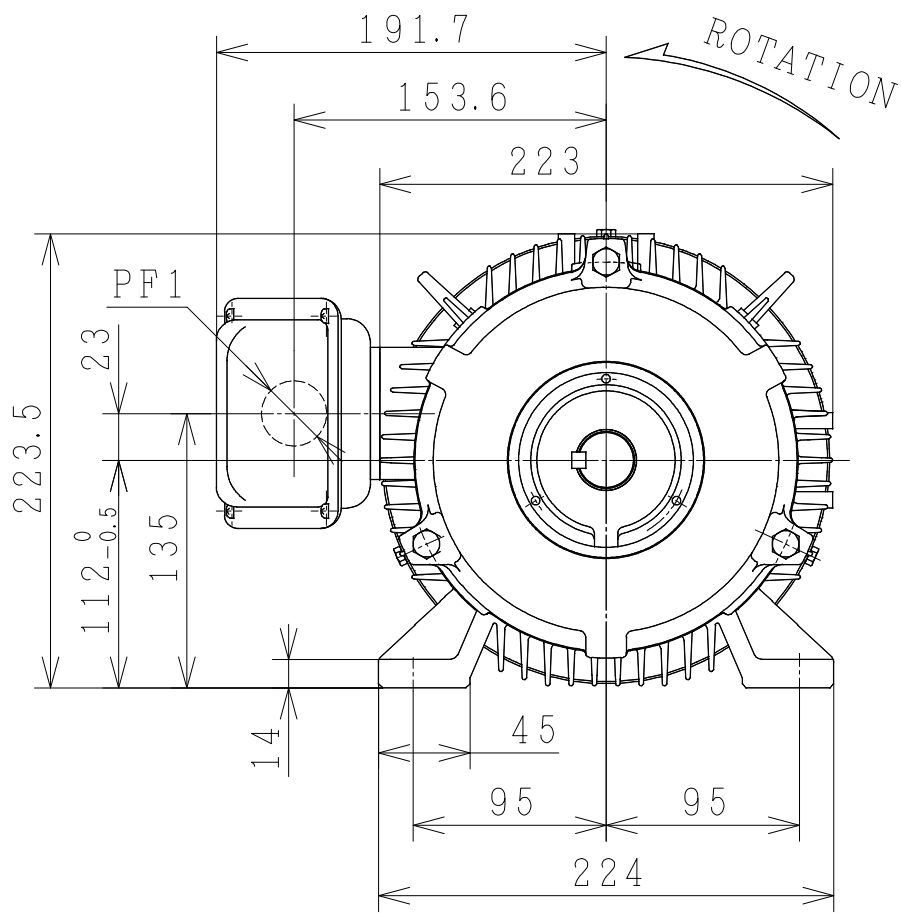



THREE-PHASE INDUCTION MOTOR

OUTPUT	TYPE	FORM	RATING	VOLTAGE (V)	FREQ. [Hz]	SYNC. SPEED (min ⁻¹)	POLES	INS. CLASS	MASS (kg)
5HP	TFO	K	S1	220/380V	50	3000	2	F	30
5HP	TFO	K	S1	220/380V	50	1500	4	F	32
3HP	TFO	K	S1	220/380V	50	1000	6	F	29

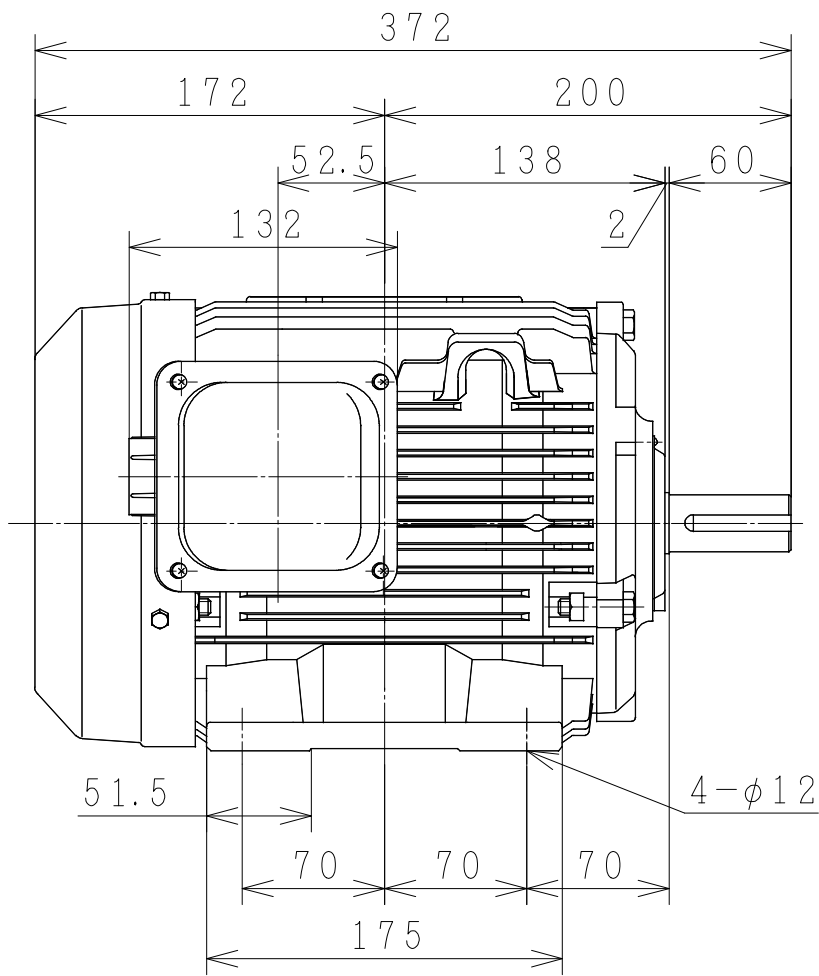

PROTECTION: IP55

PROJECTION



CUSTOMER

QTY.

ORDER NO.

WORK NO.

REV.

DWN P. Tianchai 21-Sep-2012

CHKD W. THAWAT

APPD T. SHIMOZONO

DIMENSIONS

HITACHI
Hitachi Industrial Technology (Thailand), Ltd.

4HTD02378

SH.

FRAME SIZE

TFOD-112M (TMLR)