



THREE-PHASE INDUCTION MOTOR

| OUTPUT | TYPE | FORM | RATING | VOLTAGE (V) | FREQ. (Hz) | SYNC. SPEED (min <sup>-1</sup> ) | POLES | INS. CLASS | MASS (kg) |
|--------|------|------|--------|-------------|------------|----------------------------------|-------|------------|-----------|
| 10HP   | TFO  | KK   | S1     | 380/415V    | 50         | 1500                             | 4     | F          | 48        |
| 7.5HP  | TFO  | KK   | S1     | 380/415V    | 50         | 1000                             | 6     | F          | 53        |

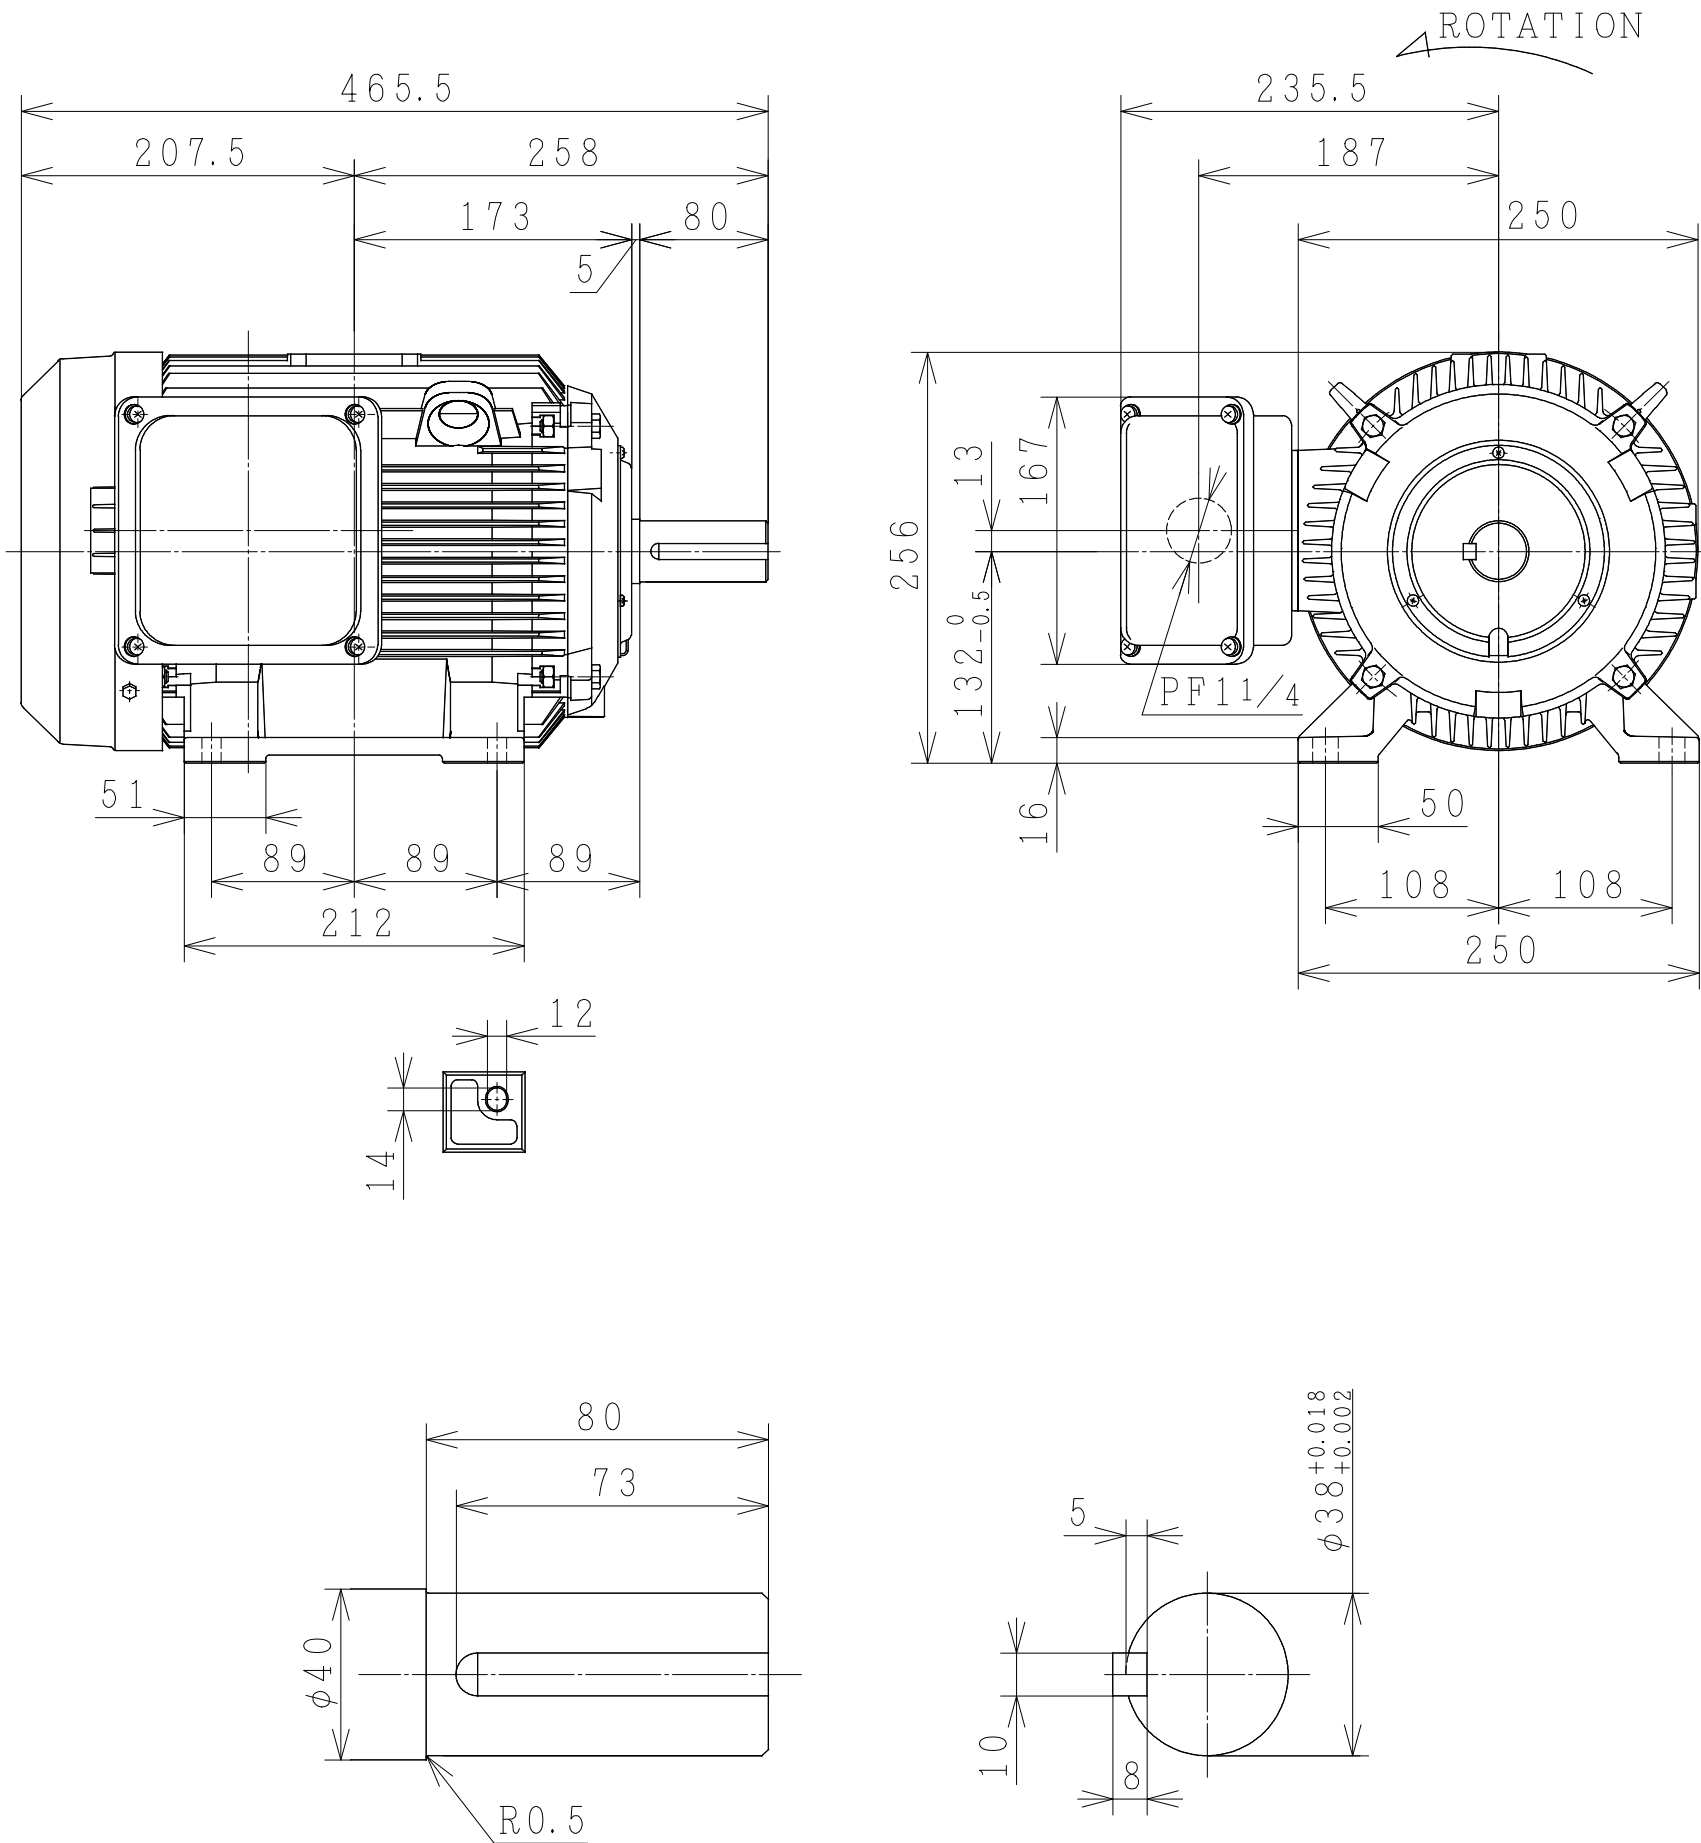

PROTECTION: IP55



|                              |                |              |            |                                                                 |           |                     |          |      |
|------------------------------|----------------|--------------|------------|-----------------------------------------------------------------|-----------|---------------------|----------|------|
| CUSTOMER                     |                |              |            | QTY.                                                            | ORDER No. |                     | WORK No. | REV. |
| DWN.                         | P. Tianchai    | 24-JUNE-2015 | DIMENSIONS | <b>HITACHI</b><br>Hitachi Industrial Technology (Thailand),Ltd. |           | HITT WORKS DWG. No. |          | SH.  |
| CHKD.                        | N. WICHARN     | S            |            |                                                                 |           | 4HTD02232           |          |      |
| APPD.                        | M. HIGASHIHARA |              |            |                                                                 |           |                     |          |      |
| FRAME SIZE TFOAF-132M (TMLR) |                |              |            |                                                                 |           |                     |          |      |