


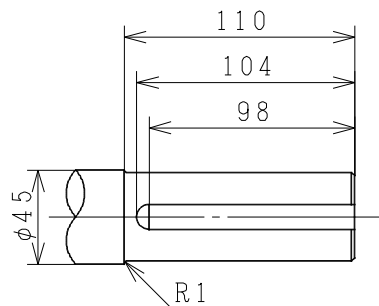


THREE-PHASE INDUCTION MOTOR

OUTPUT	TYPE	FORM	RATING	VOLTAGE (V)	FREQ. (Hz)	SYNC. SPEED (min ⁻¹)	POLES	INS. CLASS	MASS (kg)
15HP	TFO	KK	S1	380/415	50	3000	2	F	70
20HP	TFO	KK	S1	380/415	50	3000	2	F	79
15HP	TFO	KK	S1	380/415	50	1500	4	F	73
10HP	TFO	KK	S1	380/415	50	1000	6	F	75

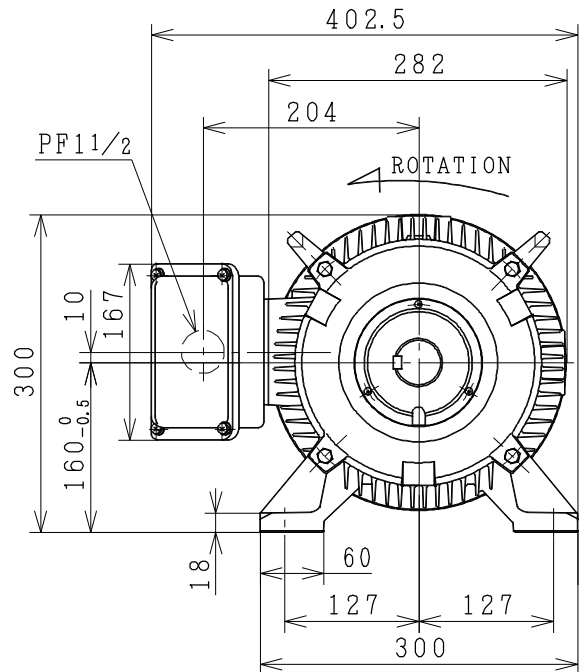

PROTECTION: IP55

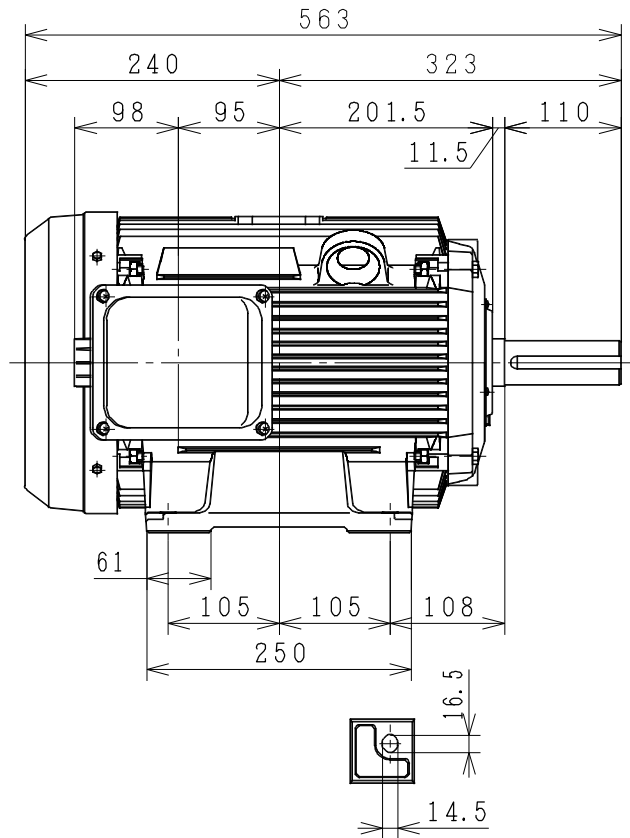

CUSTOMER				QTY.	ORDER No.		WORK No.	REV.
DWN.	P. TIANCHAI	21-09-12	DIMENSIONS	HITACHI Hitachi Industrial Technology (Thailand), Ltd.		HITT WORKS DWG. No.		SH.
CHKD.	W. THAWAT	S				4HTD02385		
APPD.	T. SHIMOZONO							
FRAME SIZE				TFOF (D) -160M (TMLR)				